

Description : Gas Detection Control Unit for measurement of flammable and/or toxic gases as well as oxygen. Graphic display. 3 alarm levels per channel. 24 freely programmable relays.

Features

- Number of Transmitters** : 1 to 8
- Signal Evaluation** : Microcontroller with A/D-Converter
- Alarm / Fault / Indication:** :
 - illuminated graphic display (240 x 64) for indication of measured values, messages and alarms
 - 24 (3 x 8) red alarm LED
 - 8 yellow fault LED (channel)
 - 8 green operation LED
 - 1 yellow fault LED (central unit)
 - 1 yellow LED for indication of service mode
- Alarm Levels** : 3 freely adjustable alarm levels per channel, latching function configurable
- Relays** : 24 freely configurable potential free change-over contacts 230 V / 5 A (total rated current: max. 10 A)
- Additional Features** :
 - Service function (service mode)
 - Horn reset
 - Alarm reactivation
- Operation Temperature** : -10 °C to +40 °C

Mechanical Features

- Dimensions** : 216 mm x 305 mm x 160 mm (Height x Width x Depth)
- Installation** : Control Panel
- Storage Temperature** : -25 °C to +60 °C

Electrical Features


- Power Supply** : 24 V DC
- Power Consumption** : Max. 2 A / 45 W

Conformity


- EC-Directives** : CE II (3)G
 94/9/EC (ATEX), 89/336/EEC (EMC), 73/23/EEC (LVD)
- Measuring Function** : Designed according to
 - EN 61779-1 to EN 61779-4
 - EN 45544-1 to EN 45544-3
 - EN 50104

Gas Detection Control Unit ET-8D
for Control Panel installation, 24 V DC
 Article-No.: 320004

Drawing

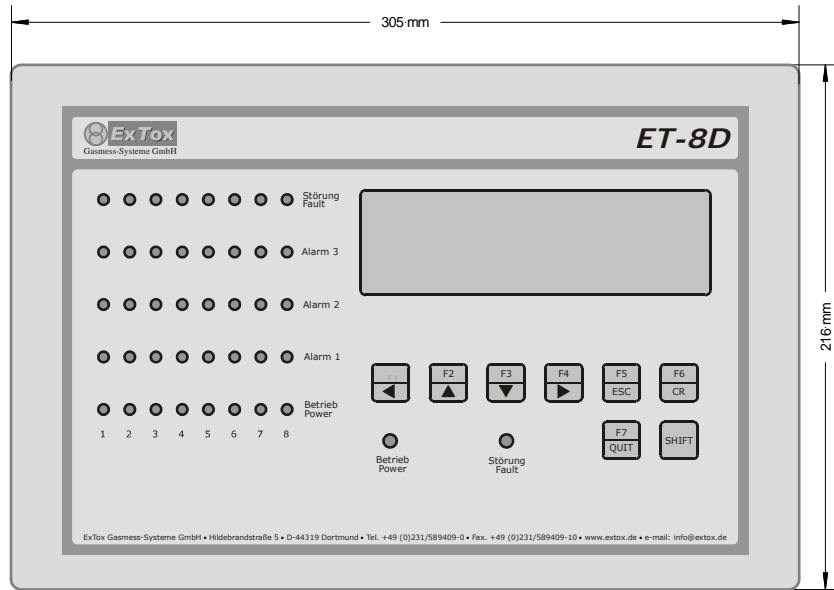

Connection Scheme

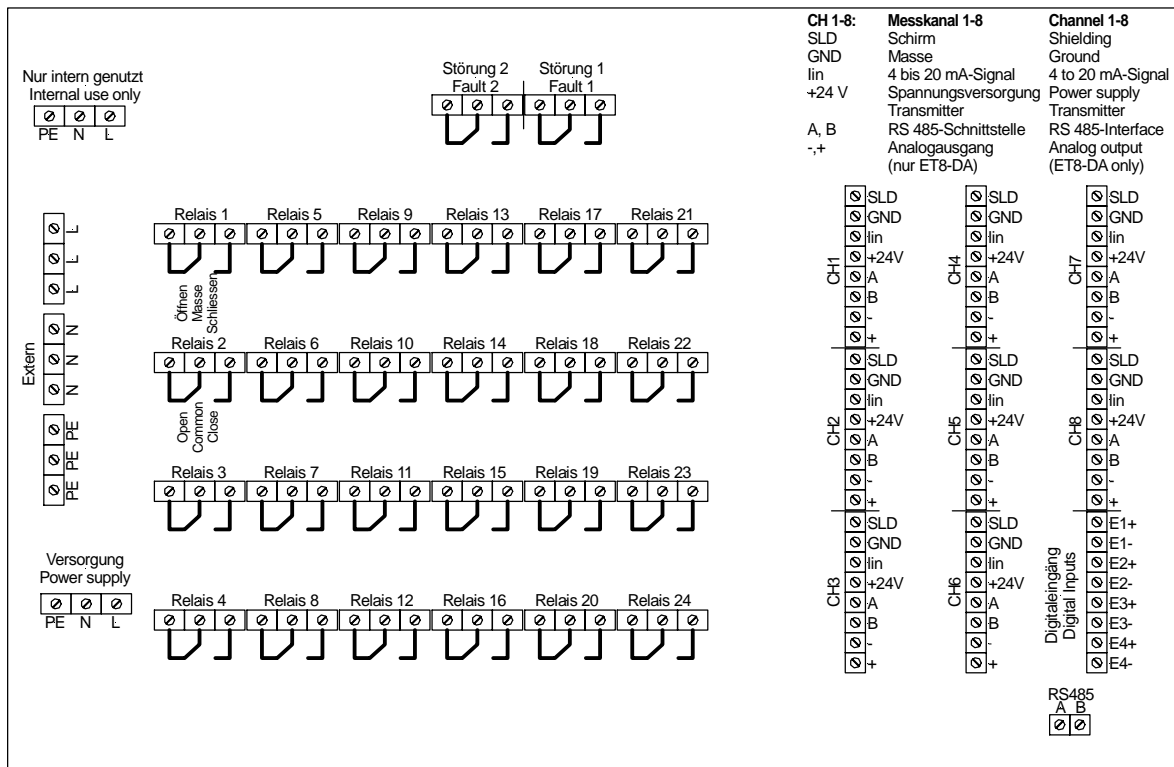

(Subject to technical changes)