

### Features

Measured Gas	: Hydrogen Sulphide (H <sub>2</sub> S)
Measuring Range	: 0 to 100 ppm
Measuring Principle	: Electrochemical Cell
Operation Temperature	: -20 °C to +45 °C
Humidity	: 15 r. H. to 90 r. H. (Please avoid condensation)
Pressure	: 900 hPa to 1100 hPa
Response Time t <sub>90</sub>	: 60 s

### Mechanical Features

Dimensions	: 180 mm x 138 mm x 100 mm (Length x Width x Height)
Weight	: approx. 2.5 kg
Material	: Housing: cast aluminium, lacquered Sensor element: stainless steel
Enclosure Rating	: IP 65 (with the exception of gas inlet)
Installation	: Wall mounting, installation in pipes with adaptor (optional)
Storage Temperature	: -40 °C to +50 °C

### Electrical Features

Power Supply	: 24 ± 6 V DC
Power Consumption	: 40 mA / 1 W
Interface	: 4-20 mA (linear)
Max. Load	: 500 Ω
Cable Gland	: M 16 x 1.5 (diameter of cable 4-8.5 mm)


### Conformity

EC-Directives	: CE <sub>0158</sub> Ex II 2G (suitable for Zone 1 and 2) 94/9/EC (ATEX), 89/336/EEC (EMC)
EC-Type Test	: BVS 04 ATEX E 066 X
Protection	: EEx d IIC T5 (-20 °C ≤ T <sub>amb</sub> ≤ 49 °C) EEx d IIC T4 (-20 °C ≤ T <sub>amb</sub> ≤ 70 °C)
Measuring Function	: Designed according to EN 45544-1 to EN 45544-3

**Transmitter ExSens H2S-100-EC**  
Article-No.: 251003

**Installation**

- Place : When monitoring working place concentrations installation at eye-level, otherwise near to the floor or close to sources of release.
- Position : sensor opening to be placed downwards
- Fixing : drilling jig as Download on our *ExTox* Homepage
- Terminal Assignment :

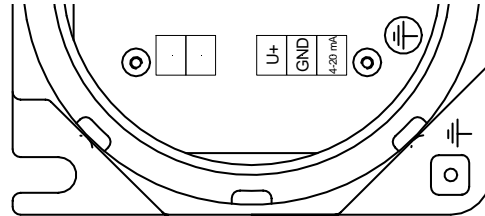

U+ Power supply 24 V  
GND Ground (Power supply and current output)  
4-20 mA Current output 4-20 mA

- Line Length : max 2,000 m when using *ExTox*-Cable 3 x 0.8 mm (corresponds to a wire resistance of 18 Ω)
- Time of Stabilisation : approx. 1 min (90%), approx. 20 min (99%)

**Use**

- Description of the Measuring Principle : The sensor consists of two or more electrodes which are arranged in an electrolyte. One of these electrodes is accessible for the measured gas. A redox reaction at the electrode takes place. This causes an electrical current which is proportional to the concentration in the measured gas.

- Cross Sensitivity : 5 ppm NO<sub>2</sub> -> Indication approx. -1 ppm H<sub>2</sub>S (negative!)  
10 ppm HCN -> Indication approx. -1 ppm H<sub>2</sub>S (negative!)  
5 ppm SO<sub>2</sub> -> Indication approx. 1 ppm H<sub>2</sub>S  
10,000 ppm H<sub>2</sub> -> Indication approx. 15 ppm H<sub>2</sub>S

- Special Influences :
  - Longer operation in very dry atmosphere should be avoided.
  - Alarm levels from 10 ppm
  - Lower limit of measuring range 5 ppm (acc. to EN 45544)

- Sensor Lifetime : typical: 2 years, depending on operation conditions

**Maintenance**

- Intervals : Minimum every half year.  
We recommend to keep EN 45544-4 and national regulations (or German BG Chemie-Information BGI 836)

- Test Gas (Zero Point) : Ambient air (free from measured gas) or synthetic air

- Test Gas (Sensitivity) : Hydrogen Sulphide,  
Concentration in the middle of measuring range or slightly above highest alarm level

- Test Gas Application : 0.5 to 1 l/min by means of *ExTox*-Calibration Adapter for minimum 120 s

**Sensor Element, Replacement** Article No. 620018

- Further Information** : EN 45544-4, BG Chemie-Information BGI 836 (German version only)

This Data Sheet is at the same time a type specific supplement to the Instruction Manual *ExTox Transmitter ExSens/Sens*.

(Subject to technical change)