

Features

Measured Gas	: Ammonia (NH ₃)
Measuring Range	: 0 to 1000 ppm
Measuring Principle	: Electrochemical Cell
Operation Temperature	: -40 °C to +40 °C (low temperature application)
Humidity	: 10 r. H. to 95 r. H. (Please avoid condensation)
Pressure	: 900 hPa to 1100 hPa
Response Time t ₉₀	: 90 s

Mechanical Features

Dimensions	: 180 mm x 138 mm x 100 mm (Length x Width x Height)
Weight	: approx. 2.5 kg
Material	: Housing: Cast aluminium, lacquered Sensor element: stainless steel
Enclosure Rating	: IP 65 (with the exception of gas inlet)
Installation	: Wall mounting, installation in pipes with adaptor (optional)
Storage Temperature	: -40 °C to +50 °C

Electrical Features

Power Supply	: 24 ± 6 V DC
Power Consumption	: 40 mA / 1 W
Interface	: 4-20 mA (linear)
Max. Load	: 500 Ω
Cable Gland	: M 16 x 1.5 (diameter of cable 4-8.5 mm)

Conformity


EC-Directives	: CE ₀₁₅₈ Ex II 2G (suitable for Zone 1 and 2) 94/9/EC (ATEX), 89/336/EEC (EMC)
EC-Type Test	: BVS 04 ATEX E 066 X
Protection	: EEx d IIC T5 (-20 °C ≤ T _{amb} ≤ 49 °C) EEx d IIC T4 (-20 °C ≤ T _{amb} ≤ 70 °C)
Measuring Function	: Designed according to EN 45544-1 to EN 45544-3

Transmitter ExSens NH3-T-1000-EC

Article-No.: 251014

Installation

- Place : When monitoring working place concentrations installation at eye-level, otherwise near to the floor or close to sources of release.
- Position : sensor opening to be placed downwards
- Fixing : drilling jig as Download on our *ExTox* Homepage
- Terminal Assignment :

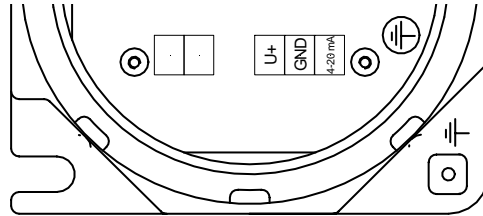

- U+ : Power supply 24 V
- GND : Ground (Power supply and current output)
- 4-20 mA : Current output 4-20 mA
- Line Length : max 2,000 m when using *ExTox*-Cable 3 x 0.8 mm (corresponds to a wire resistance of 18 Ω)
- Time of Stabilisation : approx. 5 min (90%), approx. 60 min (99%)
- Use**
- Description of the Measuring Principle : The sensor consists of two or more electrodes which are arranged in an electrolyte. One of these electrodes is accessible for the measured gas. A redox reaction at the electrode takes place. This causes an electrical current which is proportional to the concentration in the measured gas.
- Cross Sensitivity :
- 100 ppm CO -> Indication approx. 100 ppm NH₃
 - 100 ppm H₂ -> Indication approx. 100 ppm NH₃
 - 20 ppm H₂S -> Indication approx. 40 ppm NH₃
 - 20 ppm SO₂ -> Indication approx. 5 ppm NH₃
 - amines, alcohol and unsaturated hydro carbons
- Special Influences :
- Longer operation in very dry atmosphere should be avoided. Rapid changes of humidity cause a short time drift of zero point
 - The influence on the zero point (< 15 ppm in the indicated range) has to be kept in mind when temperature changes extremely).
 - Alarm levels from 100 ppm
 - Lower limit of measuring range 50 ppm (acc. to EN 45544)
- Sensor Lifetime : typical: 1-2 years, depending on operation conditions
- Maintenance**
- Intervals : Minimum every half year.
We recommend to keep EN 45544-4 and national regulations (or German BG Chemie-Information BGI 836)
- Test Gas (Zero Point) : Ambient air (free from measured gas) or synthetic air
- Test Gas (Sensitivity) : Ammonia,
Concentration in the middle of measuring range or slightly above highest alarm level
- Test Gas Application : 0.5 to 1 l/min by means of *ExTox*-Calibration Adapter for minimum 180 s
Article No. 620034
- Sensor Element, Replacement**
- Further Information** : EN 45544-4, BG Chemie-Information BGI 836 (German version only)

This Data Sheet is at the same time a type specific supplement to the Instruction Manual *ExTox Transmitter ExSens/Sens*.

(Subject to technical change)