

MINERVA® Marine

CP Series Callpoints


Features:

- Integral LED for easy identification of operation
- Callpoints are identified separately at the controller even for conventional panels
- For ease of installation various configurations are available
- Accidental operation can be prevented by optional covers
- Range can be used in hazardous and outdoor areas
- Tamper proof housings are available



CP Series Callpoints

A comprehensive range of callpoints for use with both conventional and addressable systems. All of the callpoints are designed to enable an alarm signal to be given by breaking a glass element which operates a switch and is indicated by an LED indicator. If required, an optional transparent hinged cover may be installed to guard against accidental operation.

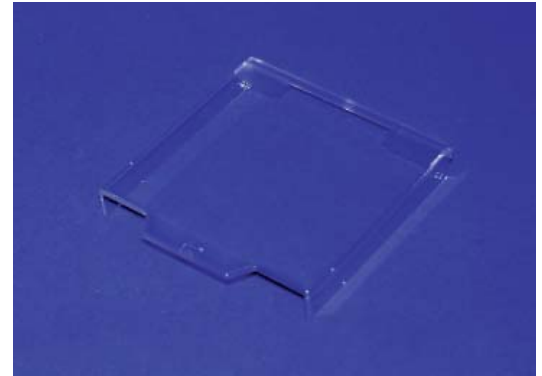

Installation

Callpoints should be installed in accordance with the installation rules that apply. All callpoints may be surface mounted using a back box. The CP200, CP210, CP270 and CP520 may be semi flush mounted if required with a single gang back box.


With the waterproof models it is essential that the correct cable glands are used for cable entry to ensure that the protection rating is maintained.

Operating Principle

The switch is held off by the "edge" of the glass. When the glass is broken the switch is released. This eliminates the risk of false alarms caused by glasses breaking on their own. A protective plastic coating on the glass prevents operator injury and inhibits the release of glass fragments. A hammer is not required.

Physical Characteristics

Indoor

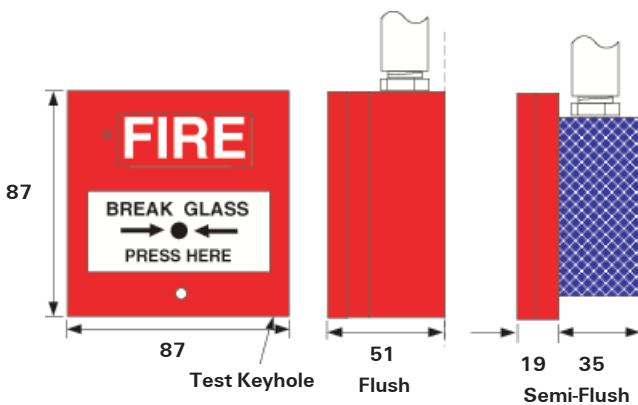

Test Facility

When the special test key is inserted from the bottom the glass drops and tests the switch.

Options


■ "No glass" (Resettable) Callpoints

All callpoints may be converted to "no glass" form by fitting the deformable operating element. This is particularly useful in galley or food processing areas where the potential for fragments of broken glass is unacceptable.

■ Transparent Hinged Cover

Fitting the cover to any callpoint provides additional protection from accidental operation.

Weatherproof

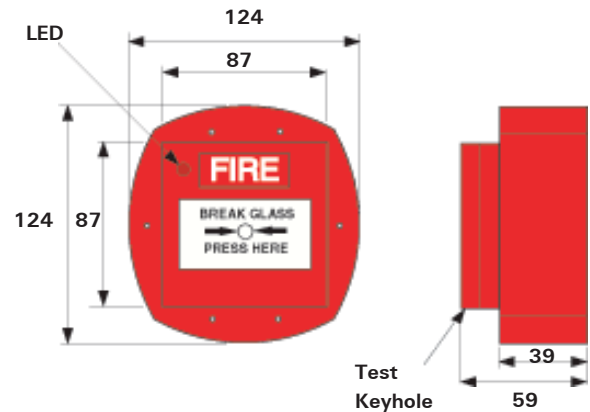

Technical Information

Model	Colour	Function Marking	Type	Range
CP200	Red	Fire	Conventional Alert	24D
CP210	Red	Fire Evacuate	Conventional Evacuate	24D
CP230	Red	Fire	Conventional Alert	67
CP220Ex	Red	Fire	Conventional Alert	67
CP270	Yellow	Evacuate	Conventional Evacuate	24D
CP520	Red	Fire	Addressable	24D
CP530	Red	Fire	Addressable	67
CP540Ex	Red	Fire	Addressable*	67
Keyswitch	White	Bomb Alarm	Conventional	24D

*Note: Requires IF500Ex Interface



The right is reserved to modify or withdraw any product or service without notice

Technical Information Sheet PSF036UM Issue 1

www.tycosafetyproducts-europe.com

©Tyco Safety Products 2003

